


## V-059V3

### Ageing 1 temperature wine cabinet Premium Pack

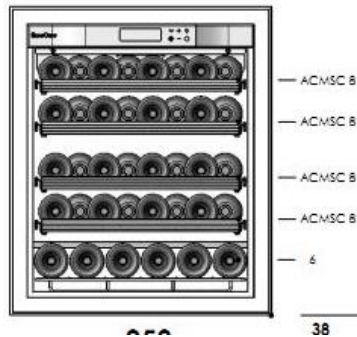

Sliding shelf  
ACMSC

#### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	52,5	47,5
Net weight (kg)*	46	41
Dimensions H x W x D (mm)	830 x 595 x 550	830 x 595 x 545
Dimensions in pack H x W x D (mm)	1000 x 620 x 620	1000 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

#### TECHNICAL FEATURES

##### REGULATION

- Electronic regulation from 5 to 20°C
- Inner electronic display and settings
- LED screen with touch buttons
- Hygrometry and temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter, threshold humidity

##### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                              |
|-----------------------------|------------------------------|
| Cold production:            | • Static cooling and air fan |
| Cords:                      | • CE/UK/AU/CH/ US            |
| Hot production:             | • Heating element            |
| Hot release :               | • Automatic                  |
|                             | • Threshold : adjustable     |
| Inner material :            | • Aluminium                  |
| Exterior coating material : | • HDF (High Density Fiber)   |
| Insulation type:            | • PU foam                    |

#### EQUIPMENTS & ACCESSORIES

##### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Reversible doors
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Humidity cassette
- Front adjustable feet
- Lock
- 1 EuroCave key ring

##### ACCESSORIES

- 4 sliding shelves
- Overall capacity: 38 bottles\*\*
- Sliding shelf capacity: 8 bottles

#### ENERGY EFFICIENCY AND CONSUMPTION


Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	132	132	172	172
Useful volume (Liter)	111	111	111	111
Acoustic emissions (dB(A))	41	41	41	41



\* Empty wine cabinet weight  
 \*\* Traditional Bordeaux bottles  
 \*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

## V-059V3

Ageing 1 temperature  
wine cabinet  
Access Pack



— AXLNH 33  
— ACMSC B  
— 6  
47



Sliding shelf  
ACMSC



Storage shelf  
AXUH

### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	52,5	47,5
Net weight (kg)*	46	41
Dimensions H x W x D (mm)	830 x 595 x 550	830 x 595 x 545
Dimensions in pack H x W x D (mm)	1000 x 620 x 620	1000 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 20°C
- Inner electronic display and settings
- LED screen with touch buttons
- Hygrometry and temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter, threshold humidity

#### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                              |
|-----------------------------|------------------------------|
| Cold production:            | • Static cooling and air fan |
| Cords:                      | • CE/UK/AU/CH/ US            |
| Hot production:             | • Heating element            |
| Hot release :               | • Automatic                  |
|                             | • Threshold : adjustable     |
| Inner material :            | • Aluminium                  |
| Exterior coating material : | • HDF (High Density Fiber)   |
| Insulation type:            | • PU foam                    |

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Reversible doors
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Humidity cassette
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 1 sliding shelf & 1 storage shelf
- Overall capacity: 47 bottles\*\*
- Sliding shelf capacity: 8 bottles
- Storage shelf capacity: up to 50 bottles

### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Acc*** (Kwh/year)	132	132	172	172
Useful volume (Liter)	111	111	111	111
Acoustic emissions (dB(A))	41	41	41	41




BVCert. 6010761

\* Empty wine cabinet weight  
\*\* Traditional Bordeaux bottles  
\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

\*  
\*\*  
\*\*\*

## S-059V3

Flush fitting  
multi-temperatures wine cabinet  
Access Pack



Sliding shelf  
ACMSC



Storage shelf  
AXUH

### GENERAL FEATURES

	Porte Full Glass/ Porte vitrée	Porte pleine technique
Poids brut emballé (kg)*	50,5	47,5
Poids net (kg)*	44	41
Dimensions H x L x P (mm)	830 x 595 x 550	830 x 595 x 545
Dimensions emballées H x L x P (mm)	1000 x 620 x 620	1000 x 620 x 620
Coloris	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 22°C (5 to 12°C at the bottom and 15 à 22°C at the top)
- Inner electronic display and settings
- LED screen with touch buttons
- Temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static cooling
Cords:	• CE/UK/AU/CH/ US
Hot production:	• Heating element
Hot release :	• Automatic
	• Threshold : adjustable
Inner material :	• Aluminium
Exterior coating material :	• HDF (High Density Fiber)
Insulation type:	• PU foam

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Reversible doors
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 4 sliding shelves
- Overall capacity: 47 bottles\*\*
- Sliding shelf capacity: 8 bottles
- Storage shelf capacity: up to 50 bottles


### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	132	132	172	172
Useful volume (Liter)	119	119	119	119
Acoustic emissions (dB(A))	41	41	41	41



BVCert. 6010761

\* Empty wine cabinet weight  
\*\* Traditional Bordeaux bottles  
\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

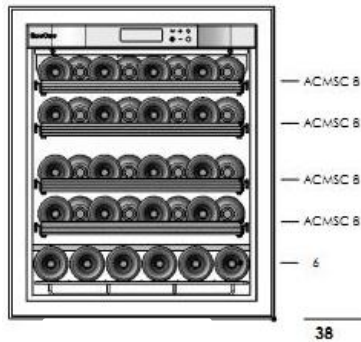

## S-059V3

Flush fitting  
multi-temperatures wine cabinet  
Premium Pack



Sliding shelf  
ACMSC

### GENERAL FEATURES

	Porte Full Glass/ Porte vitrée	Porte pleine technique
Poids brut emballé (kg)*	50,5	47,5
Poids net (kg)*	44	41
Dimensions H x L x P (mm)	830 x 595 x 550	830 x 595 x 545
Dimensions emballées H x L x P (mm)	1000 x 620 x 620	1000 x 620 x 620
Coloris	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 22°C (5 to 12°C at the bottom and 15 à 22°C at the top)
- Inner electronic display and settings
- LED screen with touch buttons
- Temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter

#### HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static cooling
Cords:	• CE/UK/AU/CH/ US
Hot production:	• Heating element
Hot release :	• Automatic
	• Threshold : adjustable
Inner material :	• Aluminium
Exterior coating material :	• HDF (High Density Fiber)
Insulation type:	• PU foam

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Reversible doors
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 4 sliding shelves
- Overall capacity: 38 bottles\*\*
- Sliding shelf capacity: 8 bottles

### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	132	132	172	172
Useful volume (Liter)	119	119	119	119
Acoustic emissions (dB(A))	41	41	41	41



BVCert. 6010761

\* Empty wine cabinet weight

\*\* Traditional Bordeaux bottles


\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

\*  
\*\*  
\*\*\*

## V-259V3

### Ageing 1 temperature wine cabinet

#### Access Pack

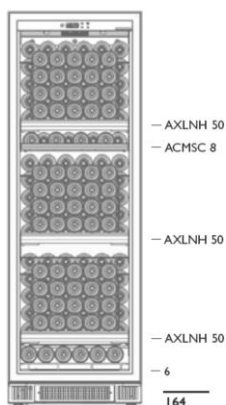

Sliding shelf  
ACMSC



Storage shelf  
AXUH

#### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	87	74
Net weight (kg)*	79	66
Dimensions H x W x D (mm)	1790 x 595 x 595	1790 x 595 x 590
Dimensions in pack H x W x D (mm)	1920 x 620 x 620	1920 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

#### TECHNICAL FEATURES

##### REGULATION

- Electronic regulation from 5 to 20°C
- Inner electronic display and settings
- LED screen with touch buttons
- Hygrometry and temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter, threshold humidity

##### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                              |
|-----------------------------|------------------------------|
| Cold production:            | • Static cooling and air fan |
| Cords:                      | • CE/UK/AU/CH/ US            |
| Hot production:             | • Heating element            |
| Hot release :               | • Automatic                  |
|                             | • Threshold : adjustable     |
| Inner material :            | • Aluminium                  |
| Exterior coating material : | • HDF (High Density Fiber)   |
| Insulation type:            | • PU foam                    |

#### EQUIPMENTS & ACCESSORIES

##### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Non reversible doors (choice on side when ordering)
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Humidity cassette
- Front adjustable feet
- Lock
- 1 EuroCave key ring

##### ACCESSORIES

- 1 sliding shelf & 3 storage shelves
- Overall capacity: 164 bottles\*\*
- Sliding shelf capacity: 8 bottles
- Flush cabinet or stand-alone


#### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	157	157	212	212
Useful volume (Liter)	318	318	318	318
Acoustic emissions (dB(A))	37	37	37	37



BVCert. 6010761

\* Empty wine cabinet weight  
 \*\* Traditional Bordeaux bottles  
 \*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

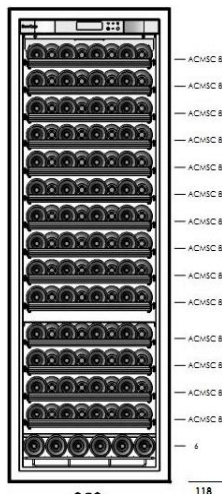

## V-259V3

Ageing 1 temperature wine cabinet  
Premium Pack



Sliding shelf  
ACMSC

### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	87	74
Net weight (kg)*	79	66
Dimensions H x W x D (mm)	1790 x 595 x 595	1790 x 595 x 590
Dimensions in pack H x W x D (mm)	1920 x 620 x 620	1920 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 20°C
- Inner electronic display and settings
- LED screen with touch buttons
- Hygrometry and temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter, threshold humidity

#### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                              |
|-----------------------------|------------------------------|
| Cold production:            | • Static cooling and air fan |
| Cords:                      | • CE/UK/AU/CH/ US            |
| Hot production:             | • Heating element            |
| Hot release :               | • Automatic                  |
|                             | • Threshold : adjustable     |
| Inner material :            | • Aluminium                  |
| Exterior coating material : | • HDF (High Density Fiber)   |
| Insulation type:            | • PU foam                    |

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Non reversible doors (choice on side when ordering)
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Humidity cassette
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 14 sliding shelves
- Overall capacity: 118 bottles\*\*
- Sliding shelf capacity: 8 bottles

### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	157	157	212	212
Useful volume (Liter)	318	318	318	318
Acoustic emissions (dB(A))	37	37	37	37




BV Cert. 6010761

\* Empty wine cabinet weight  
\*\* Traditional Bordeaux bottles  
\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)



## S-259V3

Flush fitting wine cabinet  
Multi-temperatures  
Access Pack

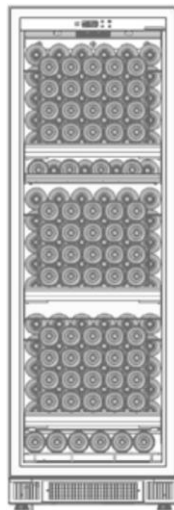

— AXLNH 50  
— ACMSC 8  
  
— AXLNH 50  
  
— AXLNH 50  
— 6  
164



Sliding shelf  
ACMSC



Storage shelf  
AXUH

### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	87	74
Net weight (kg)*	79	66
Dimensions H x W x D (mm)	1790 x 595 x 595	1790 x 595 x 590
Dimensions in pack H x W x D (mm)	1920 x 620 x 620	1920 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 22°C (5 to 12°C at the bottom and 15 à 22°C at the top)
- Inner electronic display and settings
- LED screen with touch buttons
- Temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter

#### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                            |
|-----------------------------|----------------------------|
| Cold production:            | • Static cooling           |
| Cords:                      | • CE/UK/AU/CH/ US          |
| Hot production:             | • Heating element          |
| Hot release :               | • Automatic                |
|                             | • Threshold : adjustable   |
| Inner material :            | • Aluminium                |
| Exterior coating material : | • HDF (High Density Fiber) |
| Insulation type:            | • PU foam                  |

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Non reversible doors (choice on side when ordering)
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 1 sliding shelf and 3 storage shelves
- Overall capacity: 164 bottles\*\*
- Sliding shelf capacity: 8 bottles
- Storage shelf capacity: up to 50 bottles

### ENERGY EFFICIENCY AND CONSUMPTION


Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	157	157	212	212
Useful volume (Liter)	325	325	325	325
Acoustic emissions (dB(A))	37	37	37	37



BVCert. 6010761

\* Empty wine cabinet weight  
\*\* Traditional Bordeaux bottles  
\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

\*  
\*\*  
\*\*\*

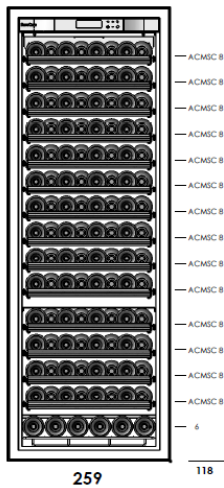

## S-259V3

Flush fitting wine cabinet  
Multi-temperatures  
Premium pack



Sliding shelf  
ACMSC

### GENERAL FEATURES

	Full Glass door/ Glass door	Technical solid door
Gross weight packaged (kg)*	87	74
Net weight (kg)*	79	66
Dimensions H x W x D (mm)	1790 x 595 x 595	1790 x 595 x 590
Dimensions in pack H x W x D (mm)	1920 x 620 x 620	1920 x 620 x 620
Colors	Nero - RAL 9005	Nero - RAL 9005

### TECHNICAL FEATURES

#### REGULATION

- Electronic regulation from 5 to 22°C (5 to 12°C at the bottom and 15 à 22°C at the top)
- Inner electronic display and settings
- LED screen with touch buttons
- Temperature visualisation
- Automatic defrost
- Visual alarms in case of disfunctioning: door open, fault sensor, temperature, carbon filter

#### HOT – COLD – INSULATION TECHNOLOGIES

- |                             |                              |
|-----------------------------|------------------------------|
| Cold production:            | • Static cooling             |
| Cords:                      | • CE/ UK/ AU/ CH/ US         |
| Hot production:             | • Automatic. Heating element |
| Hot release :               | • Threshold : adjustable     |
|                             | • Aluminium                  |
| Inner material :            | • HDF (High Density Fiber)   |
| Exterior coating material : | • PU foam                    |

Insulation type:



BVCert. 6010761

\* Empty wine cabinet weight  
\*\* Traditional Bordeaux bottles  
\*\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

### EQUIPMENTS & ACCESSORIES

#### EQUIPMENT

- On/ Off button
- Technical solid door, Full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle. Non reversible doors (choice on side when ordering)
- Low emission glasses and argon gas between 2 panes
- Inner lighting (3 lighting options: permanent, open door, disabled)
- Charcoal filter (with counter)
- Front adjustable feet
- Lock
- 1 EuroCave key ring

#### ACCESSORIES

- 14 sliding shelves
- Overall capacity: 118 bottles\*\*
- Sliding shelf capacity: 8 bottles

### ENERGY EFFICIENCY AND CONSUMPTION

Wiring	230V-50Hz (gaz R600a)		115V-60Hz (gaz R600a)	
	Full Glass/ Glass door	Technical door	Full Glass/ Glass door	Technical door
Doors type				
Energy efficiency rating	A	A	-	-
Annual energy consumption Aec*** (Kwh/year)	157	157	212	212
Useful volume (Liter)	325	325	325	325
Acoustic emissions (dB(A))	37	37	37	37